

Specification MAP/CV433/Issue 2 Dated 21.11.49 To be read in conjunction with K1001.	<u>SECURITY</u>	
	<u>Specification</u> RESTRICTED	<u>Valve</u> UNCLASSIFIED

→ Indicates a change


<u>TYPE OF VALVE</u> - Ballast Lamp  <u>ENVELOPE</u> - Glass  <u>PROTOTYPE</u> - BIC/IE	<u>MARKING</u> See K.1001/4
	<u>PACKING</u> See K.1005
	<u>BASE</u> See Drawing, Page 3.
<u>RATING</u>  The tube gives a stabilised current of 0.98 Amps. nominal, over the voltage range of 3 to 9.5 volts.	<u>DIMENSIONS</u> See Drawing, Page 3.

CV433

TESTS

To be performed in addition to those applicable in K1001.

Test Conditions	Test	Limits		No. Tested	Note	
		Min.	Max.			
a	Applied D.C. Voltage varied from 3 to 9.5v.	Filament Current (A)	0.88	1.07	100%	

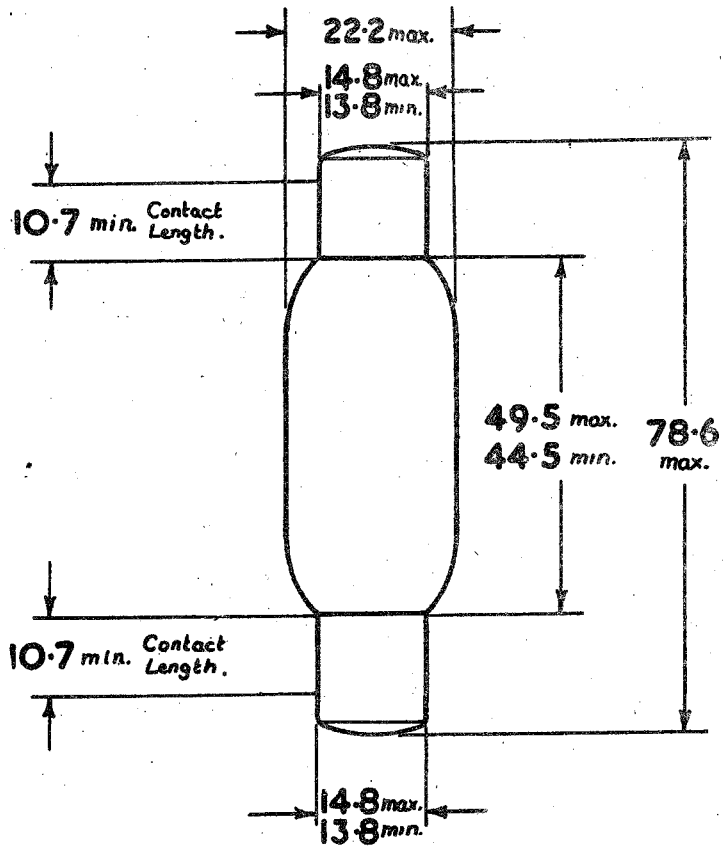

ALL DIMENSIONS ARE IN MILLIMETRES