

ESU.751

# EDISWAN

ESU.751

## HALF-WAVE MERCURY VAPOUR RECTIFIER

### RATING

Filament Voltage (volts)	$V_f$	2.0
Filament Current (amps)	$I_f$	10.0
Maximum Peak Inverse Voltage (volts)	P.I.V.(max)	5,000
Maximum Peak Anode Current (amps)	$I_a(pk)$	0.9
Cathode heating delay time (secs)		15.0
Ambient Temperature Range ( $^{\circ}C$ )		10-50

### DIMENSIONS

Maximum Overall Length (mm)	150
Maximum Diameter (mm)	58
Approximate Nett Weight (ozs)	3½
Approximate Packed Weight (ozs)	6
Approximate Packed Export Weight (lbs)	2

MOUNTING POSITION - Vertical

NOTE: See ESU.75 for initial installation instructions.


# EDISWAN

ESU.751

## HALF-WAVE MERCURY VAPOUR RECTIFIER

TOP CAP Anode

BASE EDISON SCREW - Filament

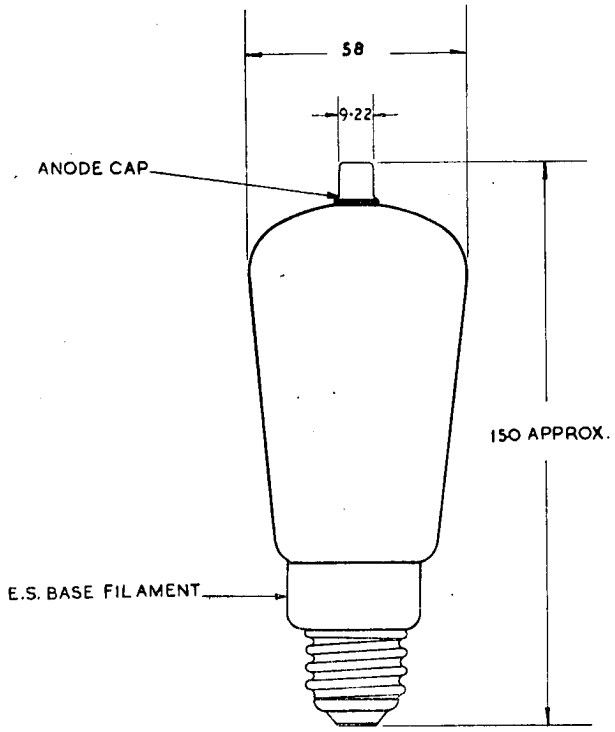

ALL DIMS IN m.m. UNLESS STATED OTHERWISE