

Sylvania

TYPE IV5 OUTPUT PENTODE

RATINGS AND CHARACTERISTICS

Filament Voltage DC	1.25	Volts
Maximum Plate Voltage	100	Volts
Maximum Screen Voltage	100	Volts
Maximum Cathode Current	5.0	Ma.

OPERATING CONDITIONS AND CHARACTERISTICS

Filament Voltage DC	1.25	1.25	1.25	Volts
Filament Current	.040	.040	.040	Ampere
Plate Voltage	30	45	67.5	Volts
Screen Voltage	30	45	67.5	Volts
Grid Voltage	-2.0	-3.0	-4.5	Volts
Plate Current	0.50	1.0	2.0	Ma.
Screen Current	0.10	0.2	0.40	Ma.
Plate Resistance	.200	.175	.150	Megohm
Mutual Conductance	450	600	750	μmhos
Load Resistance	50,000	40,000	25,000	Ohms
Power Output	5	15	50	Milliwatts
Total Harmonic Distortion	10	10	10	o/o

CIRCUIT APPLICATION

Sylvania Type IV5 is an Output Pentode suitable for use in very small radio sets or amplifiers. The other types required for a normal set complement and designed for use with it are Types IC8 (Converter), IQ6 (Diode Pentode) and IW5 (RF Pentode).

This type corresponds in service and circuit requirements to Type 1LA4 except for the improved plate current economy.

When used on battery supply the filament voltage must never exceed 1.5 volts. For AC-DC power line operation, the design center is 1.2 volts.

The tinned leads permit direct soldering into the circuit and permit great reduction in size of completed equipment, or may be cut off for use in a socket designed for this purpose.

PHYSICAL SPECIFICATIONS


Style	T-3
Base	Flexible Leads
Bulb	T-3
Diameter	0.400" Max.
Lead Length	1.25" Min.
Overall Length	1.5" Max.
Mounting Position	Any

BASE PIN CONNECTIONS

Pin 1 - No Connection
Pin 2 - Control Grid
Pin 3 - No Connection
Pin 4 - Negative Filament + Suppressor
Pin 5 - Positive Filament
Pin 6 - No Connection
Pin 7 - Plate
Pin 8 - Screen Grid
RMA Basing 8CP-0-0

from RMA release #467A,
Jan. 31, 1947

PLATE OR SCREEN CURRENT IN MILLIAMPERES

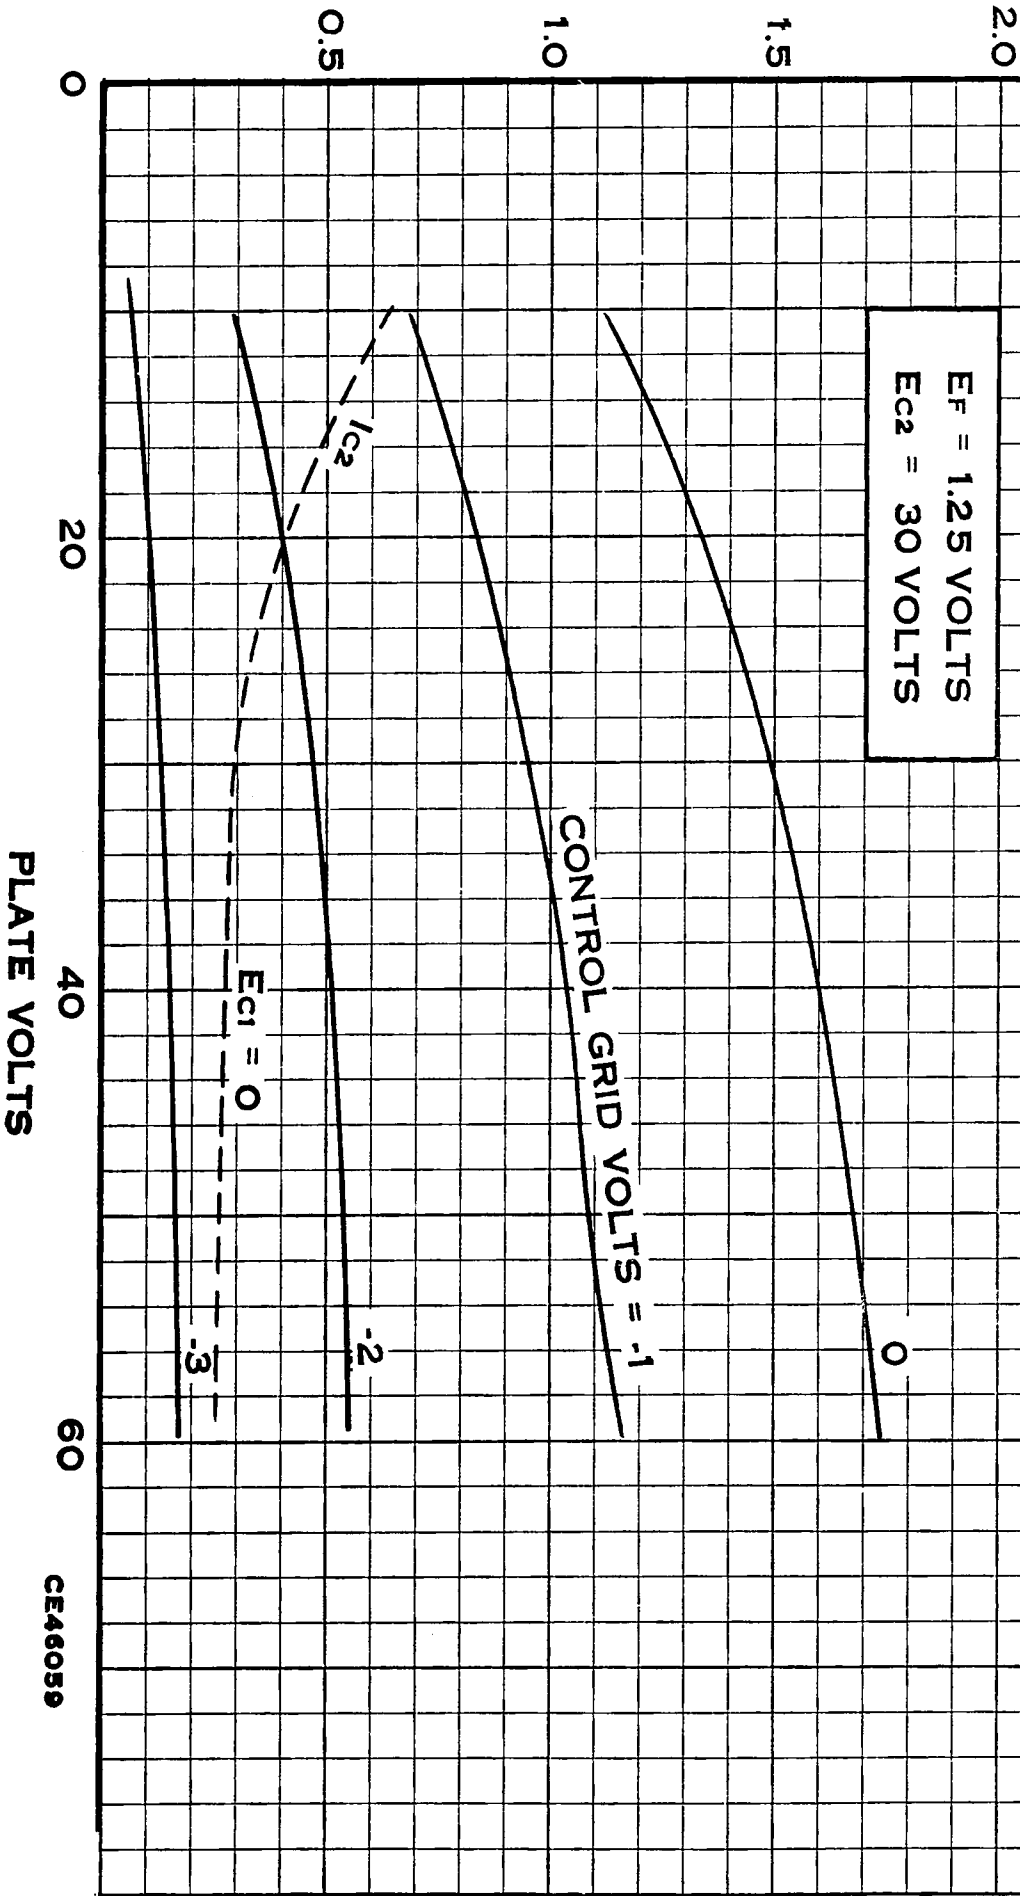

CE46059

PLATE OR SCREEN CURRENT IN MILLIAMPERES

6.0

4.0

2.0

0

40

80

120


160

PLATE VOLTS

SYLVANIA TYPE 1V5
AVERAGE PLATE CHARACTERISTICS
PENTODE CONNECTION

$E_F = 1.25$ VOLTS
 $E_{C2} = 67.5$ VOLTS

CONTROL GRID VOLTS = -.3

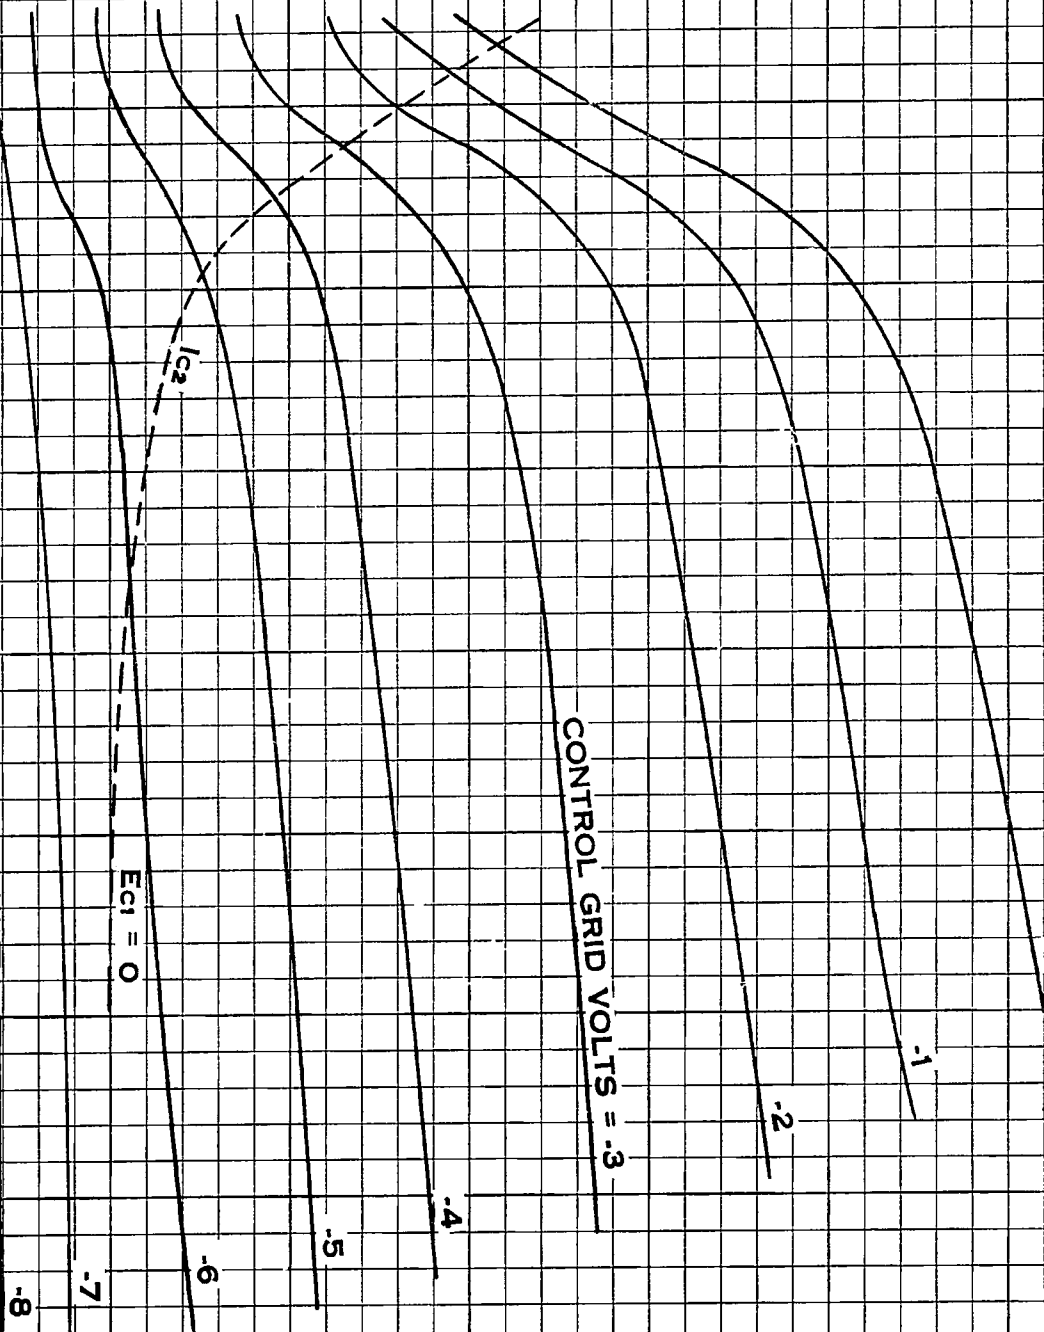

$E_{C1} = 0$

I_{g2}

CE48060