

**EDISWAN****SIIE12**

**SPECIAL QUALITY BEAM TETRODE**  
Indirectly heated—for parallel operation

**TENTATIVE**

SIIE12

SIIE12

**EDISWAN****SIIE12 JEDEC Type 7971**

**SPECIAL QUALITY BEAM TETRODE**  
Indirectly heated—for parallel operation

**TENTATIVE****GENERAL**

The SIIE12 is a Special Quality Beam Tetrode intended for use as a series or shunt control valve in stabilised power supply units, and has similar characteristics (within ratings) to the 12E1. It is indirectly heated and should be parallel connected to the supply. A special shock resistant construction is employed which gives increased reliability and life expectancy.

Quality tests are performed on electrical characteristics, vibration noise, base strain, glass strain, electrode resonance, vibration fatigue, shock resistance, heater cycling, stability and life.

**RATING**

Heater Voltage	(volts)	V <sub>H</sub>	6.3
Heater Current	(amps)	I <sub>H</sub>	1.6
Maximum Anode Voltage	(volts)	V <sub>A(max)</sub>	800
Maximum Screen Voltage	(volts)	V <sub>G2(max)</sub>	300
Maximum Control Grid Voltage (volts)		V <sub>G1(max)</sub>	—100
Maximum Voltage between Grids 1 and 2	(volts)	V <sub>G1-g2(max)</sub>	400
Mutual Conductance	(mA/V)	g <sub>m</sub>	13.5*
Inner Mu		μ <sub>G1-g2</sub>	5.5*
Maximum Anode Dissipation	(watts)	P <sub>A(max)</sub>	28
Maximum Screen Dissipation	(watts)	P <sub>G2(max)</sub>	5
Maximum Cathode Current	(mA)	I <sub>K(max)</sub>	300
Maximum Heater to Cathode Voltage (DC heater negative)	(volts)	V <sub>H-k(max)</sub>	350
Maximum Heater to Cathode Voltage (DC heater positive)	(volts)	V <sub>H-k(max)</sub>	150
Maximum Resistance Grid 1 to Cathode—Fixed Bias	(ohms)	R <sub>G1-k(max)</sub>	100,000
Maximum Resistance Grid 1 to Cathode—Cathode Follower	(MΩ)	R <sub>G1-k(max)</sub>	1

INDUSTRIAL  
February 1958 VALVE & CRT DIVISION

Issue 1/7

**SIEMENS EDISON SWAN LIMITED**

Maximum Acceleration (continuous operation)	(g)	2
Maximum Shock (short duration)	(g)	500
Maximum Peak Anode Voltage (Scanning Operation)	(volts)	V <sub>A(pk)max</sub> 1,500†

\* Measured at V<sub>A</sub> = V<sub>G2</sub> = 150 v ; I<sub>A</sub> = 200 mA ; I<sub>G2</sub> = 12 mA ; V<sub>G1</sub> = —8.5 v.

† For duty cycle of 1/25 and maximum pulse duration 200 μ seconds.

All maximum ratings are Absolute Values not Design Centres.

**INTER-ELECTRODE CAPACITANCES (pF)**

Anode/Grid 1	c <sub>a-g1</sub>	1.8
Grid 1/Earth	c <sub>in</sub>	19.5
Anode/Earth	c <sub>out</sub>	16.5

"Earth" denotes the remaining earthy potential electrodes, heater and shields connected to cathode.

**DIMENSIONS**

Maximum Overall Length	(mm)	98
Maximum Diameter	(mm)	44
Maximum Seated Height	(mm)	83
Approximate Nett Weight	(ozs)	2½
Approximate Packed Weight	(ozs)	5½

**MOUNTING POSITION** Vertical. If run horizontally then it is recommended that the axis AB be on a horizontal plane.

**BULB** Clear.

INDUSTRIAL  
February 1958 VALVE & CRT DIVISION

Issue 1/7

**SIEMENS EDISON SWAN LIMITED**


JEDEC Type 7971

**EDISWAN**  
MAZDA  
**SII/E12**

**SPECIAL QUALITY BEAM TETRODE**  
Indirectly heated—for parallel operation

AVERAGE CHARACTERISTIC CURVES:  $I_a$ ,  $I_{g2}/V_g$   
 $V_{g2} = 150V$

Curves taken with short duration pulse  
Pulse Length =  $12\mu$ sec.      Pulse Ratio = 400:1

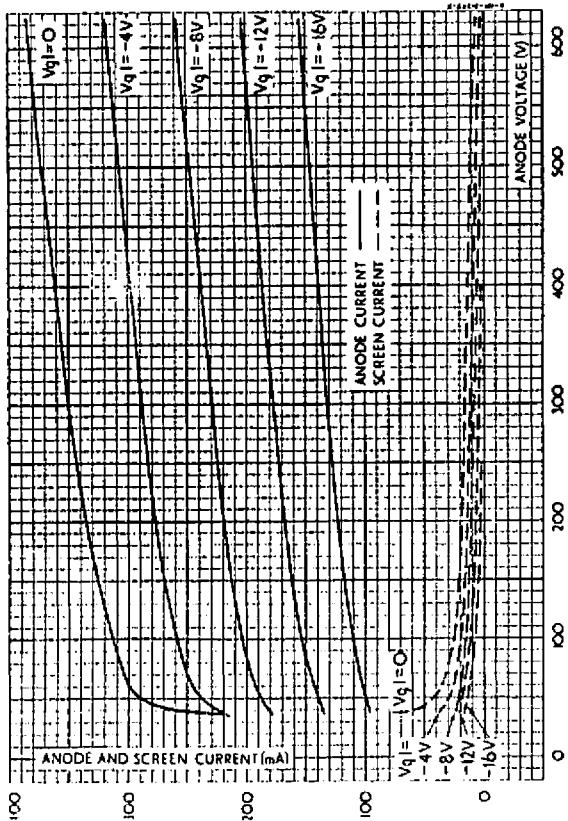


**SII/E12**

**EDISWAN**  
MAZDA  
**SII/E12**

**SPECIAL QUALITY BEAM TETRODE**  
Indirectly heated—for parallel operation

AVERAGE CHARACTERISTIC CURVES:  $I_a/V_g$   
TRIODE CONNECTED

Curves taken with short duration pulse  
Pulse Length =  $12\mu$ sec.      Pulse Ratio = 400:1  
Grid Current starts at  $V_{g1} = -1.0V$  (approx.)

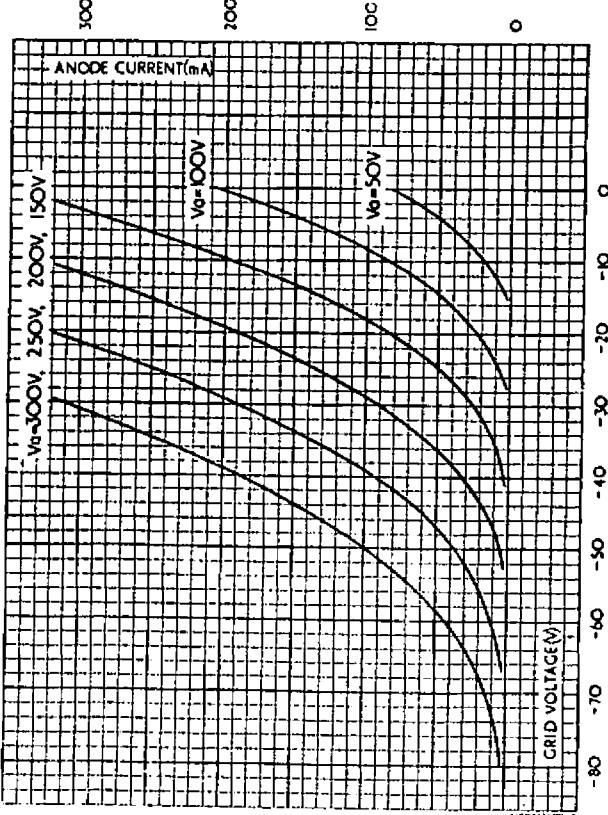

November 1958

INDUSTRIAL  
VALVE & CRT DIVISION

Issue 1/7

SIEMENS EDISON SWAN LIMITED

November 1958

INDUSTRIAL  
VALVE & CRT DIVISION

Issue 1/7


SIEMENS EDISON SWAN LIMITED

**EDISWAN**  
MAZDA  
**SIIE12**

**SPECIAL QUALITY BEAM TETRODE**  
Indirectly heated—for parallel operation  
**TENTATIVE**

BASE—International Octal.

BASING—8KY



Viewed from free end of pins

#### CONNECTIONS

Pin 1	Internal Connection	IC
Pin 2	Heater	h
Pin 3	Anode	a
Pin 4	Grid 2	g2
Pin 5	Grid 1	g1
Pin 6	Beam Plates	bp
Pin 7	Heater	h
Pin 8	Cathode	k

Note.—Pins 6 and 8 should be connected together at the valve holder.


SIIE12 SIIE12

**EDISWAN**  
MAZDA  
**SIIE12**

**SPECIAL QUALITY BEAM TETRODE**  
Indirectly heated—for parallel operation

AVERAGE CHARACTERISTIC CURVES:  $I_a$ ,  $I_g$ / $V_{g1}$

Curves taken with short duration pulse  
Pulse Length =  $12\mu$ sec. Pulse Ratio = 400 : 1  
Grid Current starts at  $V_{g1} = -1.0V$  (approx.)

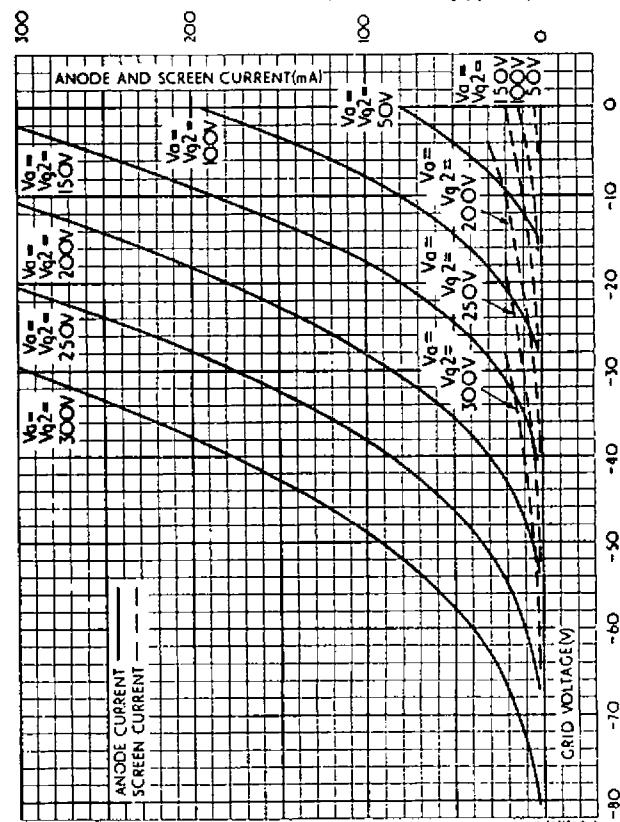

JEDEC Type 7971


SII/E12

**EDISWAN**  
MAZDA  
**SII/E12**

**SPECIAL QUALITY BEAM TETRODE**  
Indirectly heated—for parallel operation

**AVERAGE CHARACTERISTIC CURVES :  $I_a/V_a$**   
TRIODE CONNECTED

Curves taken with short duration pulse  
Pulse Length =  $12\mu$  sec. Pulse Ratio = 400 : 1  
Grid Current starts at  $V_{g1} = -1.0$  V(approx)

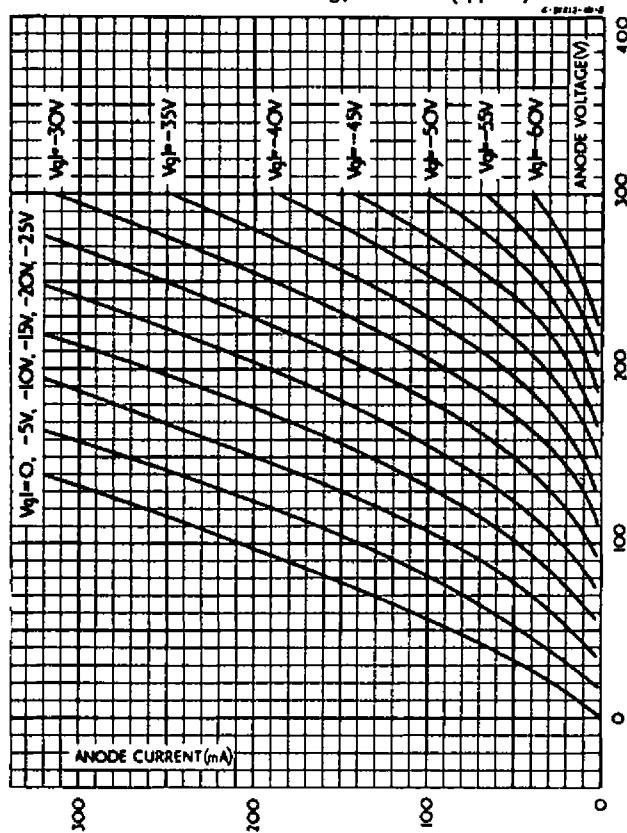

November 1958

INDUSTRIAL  
VALVE & CRT DIVISION

Issue 1/7

SIEMENS EDISON SWAN LIMITED