

TRC 8-15-65

TUBE TEST DATA

FOR PRECISION MODELS

640, 660

FOR USE WITH

ROLL CHART TRC H2B

COLETRONICS SERVICE INC.

78-63 76th STREET • GLENDALE, N. Y. 11227

COPYRIGHT 1965 COLETRONICS SERVICE INC. GLENDALE, N. Y.

TRC TUBE DATA

2.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
3GK6		4	5	23	2	1	39	●2379
		●Ignore glow on 3						
3HA5		3	4	21	2	27	27	15
		Lever 2 must be thrown to open position						
3HK5		3	4	21	2	27	27	15
3HM5		3	4	22	2	27	27	15
		Lever 2 must be thrown to open position						
3HS8	Pen-1	4	5	23	2	1	-	2789
"	Pen-2	4	5	23	2	-	-	2367
3HT6		2	5	22	2	13	-	278
		Lever 3 must be thrown to open position						
3JC6		4	5	22	2	13	13	278
3JD6		4	5	22	2	13	13	278
4GK5		3	6	22	2	17	17	25
4GZ5		3	6	22	2	1	25	●2567
		●Ignore glow on 2						
<u>4HA7</u>								
(Key at 3)	Tri-1	2	7	26	2	6	-	15
(Key at 5)	Tri-2	4	7	26	2	9	-	12
<u>4HC7</u>								
(Key at 0)	Tri-1	1	6	26	2	4	-	79
(Key at 6)	Tri-2	7	6	26	2	9	-	48
4HK5		3	6	21	2	27	27	15
4HS8	Pen-1	4	6	23	2	1	-	2789
"	Pen-2	4	6	23	2	-	-	2367
4HT6		2	6	22	2	13	-	278
		Lever 3 must be thrown to open position						
4JC6		4	7	22	2	13	13	278
4JD6		4	7	22	2	13	13	278
4JK6		3	5	21	2	2	-	156

TRC TUBE DATA

3.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
4JL6		3	5	22	2	2	-	156
<u>5AF11</u>								
(Key at 7)	Pen	6	7	19	3	3	-	459
(Key at 2)	Di-1	1	7	19	3	9	-	56
(Key at 0)	Di-2	1	7	19	3	5	-	68
5BC3	Di-1	1	8	12	1	-	-	89
	CAUTION:-Lever 2 must be thrown to open position							
	Di-2	1	8	10	1	-	-	56
	CAUTION:-Lever 2 must be thrown to open position							
	Must show short on 5-6-8-9							
	Fil Cont - 1-2-3							
5DG4	P1-1	1	8	25	2	-	-	7
"	P1-2	1	8	25	2	-	-	5
5EW6		3	8	20	2	2	-	156
5GX6		3	7	23	2	2	-	1567
<u>5HC7</u>								
(Key at 0)	Tri-1	1	8	26	2	4	-	79
(Key at 6)	Tri-2	7	8	26	2	9	-	48
5HG8	Tri	4	8	23	2	3	13	67
	Pent	4	8	22	2	1	13	289
5JK6		3	8	21	2	2	-	156
5JL6		3	8	22	2	2	-	156
5KE8	Tri	4	8	24	2	8	-	19
"	Pent	4	8	23	2	7	-	236
<u>6AF11</u>								
(Key at 0)	Tri-1	1	9	24	2	5	-	68
	Tri-2	1	9	25	2	7	-	34
(Key at 5)	Pen	6	9	25	2	1	-	237
<u>6AG11</u>								
(Key at 8)	Tri-1	9	9	22	2	4	-	23
	Di-1	9	9	24	2	6	-	5
(Key at 2)	Tri-2	3	9	22	2	6	-	78
	Di-2	3	9	24	2	4	-	5
6AG12		8	9	20	1	5	27	2

TRC TUBE DATA

4.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
<u>6AL11</u>								
(Key at 2)	Pen-1	1	9	18	3	4	3	5689
(Key at 6)	Pen-2	5	9	18	3	2	7	134
<u>6AR11</u>								
(Key at 2)	Pen-2	3	9	21	2	8	-	4567
(Key at 8)	Pen-1	9	9	21	2	6	-	2345
<u>6AS11</u>								
(Key at 0)	Tri-1	1	9	23	2	5	-	68
	Tri-2	1	9	24	2	7	-	34
(Key at 5)	Pen	6	9	22	2	1	-	237
<u>6AV11</u>								
(Key at 5)	Tri-1	6	9	26	2	9	-	12
	Tri-3	6	9	26	2	8	-	37
(Key at 2)	Tri-2	3	9	26	2	8	-	79
6AY3		4	9	24	2	9	27	27
	●Ignore glow on 2							
<u>6AY11</u>								
(Key at 0)	Di-2	1	9	25	2	2	-	3
	Tri-1	1	9	26	2	9	-	78
	Tri-2	1	9	25	2	4	-	56
(Key at 4)	Di-1	3	9	25	2	2	-	1
6BA3		4	9	4	1	9	27	2
	May show short on 2-7							
<u>6BA11</u>								
(Key at 4)	Pen-1	3	9	24	2	0	-	678
(Key at 0)	Pen-2	1	9	24	2	8	-	346
(Key at 8)	Tri	7	9	26	2	5	-	46
6BC5		3	9	23	2	27	27	156
	Must show short on 2-7							
	Cathode short test - throw 2-7 together							
<u>6BD11</u>								
(Key at 0)	Tri-1	1	9	24	2	5	-	68
	Tri-2	1	9	25	2	7	-	34
(Key at 5)	Pen	4	9	25	2	1	-	237
<u>6BE3</u>								
(Key at 2)		1	9	23	2	9	60	60
	Must show short on 6-0							
	Plate short test - throw 6-0 together							

TRC TUBE DATA

5.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
6BF8	Di-1	4	9	25	2	6	-	9
"	Di-2	4	9	25	2	-	=	8
"	Di-3	4	9	25	2	-	-	7
"	Di-4	4	9	25	2	-	-	3
"	Di-5	4	9	25	2	-	-	2
"	Di-6	4	9	25	2	-	-	1
<u>6BF11</u>								
(Key at 0)	Pen-1	1	9	28	2	2	-	3567
(Key at 8)	Pen-2	7	9	23	2	4	-	356
<u>6BJ3</u>								
(Keyat 0)		1	9	24	2	7	-	4
6B ⁸	Pen	4	9	24	2	9	-	178
"	Di	4	8	24	2	3	-	6
6C9	Tet-1	4	9	24	2	6	-	789
"	Tet-2	4	9	24	2	0	-	123
6CM5		2	9	23	2	38	1348	459
	May show short on 1-3-4-8							
	Cathode short test - throw levers 3-8 together							
6DE7	Tri-1	4	9	10	1	8	23	67
"	Tri-2	4	9	22	2	9	-	123
6DM4		7	9	24	2	3	-	5
6DR7	Tri-1	4	9	8	1	8	23	67
"	Tri-2	4	9	23	2	9	-	123
	Must show short on 2-3							
6DS4		4	9	18	3	3	-	12
6DT4		7	9	4	1	3	15	5
	Lever 1 must be thrown to open position							
6DW4		4	9	4	1	9	27	2
	Lever 7 must be thrown to open position							
6DY5		2	9	24	2	3	-	279
6DZ4		3	9	24	2	5	-	1267
	Must show short on 1-2-6-7							
6FD6		3	9	23	2	7	-	1256
6FD10		3	10	23	2	7	-	1256

TRC TUBE DATA

6.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
6FG6	Tri	5	9	21	3	3	268	10
"	Eye	5	9	0	4	-	-	●7268
	●Ignore glow on 2-6 See instructions for eye test Target short - throw 2-6-8 together							
<u>6FM7</u>								
(Key at 7)	Tri-1	6	9	19	3	3	-	45
(Key at 2)	Tri-2	1	9	18	3	9	-	57
6FQ7	Tri-1	4	9	7	1	8	-	67
"	Tri-2	4	9	7	1	3	-	12
<u>6FY7</u>								
(Key at 5)	Tri-1	4	9	8	1	1	-	23
(Key at 2)	Tri-2	1	9	22	2	9	-	57
<u>6G11</u>								
(Key at 6)	Pen-1	7	9	23	2	2	-	134
(Key at 2)	Pen-2	1	9	25	2	4	-	5689
6GB5*		4	9	22	2	38	123678	160
	Levers 2-7 must be thrown to open position *Magnoval base - do not insert fully in socket							
<u>6GE5</u>								
(Key at 5)		6	9	23	2	29	2389	●7380
	●Ignore glow on 3							
<u>6GF5</u>								
(Key at 5)		6	9	23	2	29	2389	●7380
	●Ignore glow on 3							
6GF7	Tri-1	4	9	29	2	1	-	89
"	Tri-2	4	9	23	2	3	-	26
6GJ5		4	9	24	2	3	1267	670
	Levers 1-2 must be thrown to open position							
6GL7	Tri-1	7	9	26	2	6	-	45
"	Tri-2	7	9	22	2	3	-	12
6GM5		4	9	25	2	7	-	169
6GM8	Tri-1	4	9	23	2	8	-	67
"	Tri-2	4	9	23	2	3	-	12
6GT5		4	9	23	2	3	1267	●12679
	●Ignore glow on 12							

TRC TUBE DATA

7.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
6GU5		3	9	21	2	27	27	156
	Must show short on 2-7							
6GU7	Tri-1	4	9	24	2	8	5	67
"	Tri-2	4	9	24	2	3	-	12
<u>6GV5</u>								
(Key at 4)		3	9	24	2	18	1278	2790
	Must show short on 1-2-7-8							
	Cathode short test - throw 1-8 together							
	Grid cap goes to top of tube							
6GV8	Tri	4	9	24	2	3	-	12
"	Pen	4	9	22	2	8	-	679
6GW6		2	9	18	3	8	-	450
6GW8	Tri	4	9	26	2	2	-	19
"	Pent	4	9	23	2	7	-	368
6GX6		3	9	23	2	2	-	1567
<u>6GY5</u>								
(Key at 4)		3	9	22	2	18	1278	2790
	Must show short on 1-2-7-8							
	Cathode short test - throw 1-8 together							
6GY6		3	9	21	2	2	-	1567
6GY8	Tri-1	4	9	28	2	7	-	6
"	Tri-2	4	9	22	2	8	-	39
"	Tri-3	4	9	27	2	-	-	12
6HA5		3	9	21	2	27	27	15
	Lever 2 must be thrown to open position							
<u>6HB5</u>								
(Key at 0)		1	9	22	2	4	-	237
6HB6		4	9	22	2	1	3689	●396827
	●Ignore glow on 36							
6HB7	Tri	4	9	23	2	13	13	89
"	Pen	4	9	24	2	13	13	267
	Lever 1- must be thrown to open position							
6HC8	Tri	4	9	18	3	8	-	19
"	Pen	4	9	18	3	2	-	367

TRC TUBE DATA

8.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
<u>6HE5</u> (Key at 2)		1	9	19	3	6	0	4580
		Must show short on 5-0						
<u>6HF5</u> (Key at 4)		3	9	23	2	18	1278	2790
		Must show short on 1278						
		Cathode short test - throw 1-8 together						
		Grid cap goes to top of tube						
6HF8	Tri	4	9	24	2	1	-	23
"	Pen	4	9	22	2	6	-	789
6HG5		3	9	7	1	2	17	●1756
		●Ignore glow on 1						
6HJ8	Pen	4	9	23	2	1	-	2369
"	Di	4	9	24	2	7	-	8
6HK5		3	9	21	2	27	27	15
6HM5		3	9	22	2	27	27	15
		Lever 2 must be thrown to open position						
6HR6		3	9	21	2	7	-	156
6HS6		3	9	22	2	7	-	1256
6HT6		2	9	22	2	13	-	278
		Lever 3 must be thrown to open position						
6HW8		4	9	24	2	7	-	123689
6HZ6		4	9	17	3	2	-	156
<u>6J10</u> (Key at 0)	Pen-1	0	9	26	4	8	1	4567
(Key at 6)	Pen-2	5	9	18	3	9	7	248
<u>6J11</u> (Key at 2)	Pen-2	3	9	22	2	8	-	4567
(Key at 8)	Pen-1	9	9	22	2	3	-	2456
6JB6		4	9	18	3	3	1267	670
		Levers 1-2 must be thrown to open position						
6JC6		4	9	22	2	13	13	278

TRC TUBE DATA

9.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
6JC8	Tri	4	9	18	3	17	7	89
"	Pen	4	9	18	3	-	-	236
Cathode short test - throw 1-7 together								
6JD6		4	9	22	2	13	13	278
6JE6		4	9	23	2	3	1267	●126780
●Ignore glow on 12								
Grid cap goes to top of tube								
6JG6		4	9	17	3	3	17	279
Lever 1 must be thrown to open position								
6JH6		3	9	22	2	2	-	1567
6JH8	Sec-1	4	9	24	2	7	5	369
"	Sec-2	4	9	24	2	-	-	368
6JK6		3	9	21	2	2	-	156
6JK8	Di-1	4	9	18	3	8	-	67
"	Di-2	4	9	18	3	3	-	12
6JL6		3	9	22	2	2	-	156
6JT6		4	9	23	2	3	17	279
Lever 1 must be thrown to open position								
6JU8	Di-1	4	9	24	2	9	*	78
"	Di-2	4	9	24	2	98	-	7
"	Di-3	4	9	24	2	3	-	12
"	Di-4	4	9	24	2	32	-	1
*Must show short on 2-8								
6JV8	Tri	4	9	18	3	1	-	23
"	Pen	4	9	17	3	-	-	789
<u>6JZ8</u>								
(Key at 8)	Pen	9	9	23	2	4	12	●1230
●Ignore glow on 1								
(Key at 5)	Tri	6	9	26	2	3	-	27
6KA8	Tri	4	9	24	2	3	-	12
"	Pen	4	9	22	2	3	-	6789
6KD8	Tri	4	9	22	2	8	-	19
"	Pen	4	9	22	2	7	-	236

TRC TUBE DATA

10.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
6KE8	Tri	4	9	24	2	8	-	19
"	Pen	4	9	23	2	7	-	236
6KL8	Pen	4	9	24	2	3	-	1267
"	Di	4	9	28	3	-	-	8
6KM8	Di	4	9	27	3	6	-	3
"	Tet=1	4	9	5	1	-	-	178
"	Tet-2	4	9	6	1	-	-	278
"	Tet=3	4	9	5	1	-	-	789
6KV8	Tri	4	9	23	2	1	-	23
"	Pen	4	9	21	2	6	-	789
6KZ8	Tri	4	9	22	2	8	-	19
"	Pen	4	9	22	2	3	-	267
6LB8	Tri	4	9	29	2	1	-	23
"	Pen	4	9	22	2	6	-	789
6LC8	Tri	4	9	24	2	3	5	12
"	Pen	4	9	22	2	7	5	689
May show short on 3-7								
6LF8	Tri	4	9	24	2	1	-	23
"	Pen	4	9	21	2	6	-	789
6LM8	Tri	4	7	23	2	8	-	19
"	Pen	4	7	23	2	7	-	236
<u>6M11</u>								
(Key at 0)	Tri-1	1	9	22	2	9	-	78
	Tri-2	1	9	22	2	4	-	56
(Key at 4)	Pen	5	9	23	2	1	-	267
<u>6Q11</u>								
(Key at 5)	Tri-1	6	9	25	2	9	-	12
	Tri-3	6	9	25	2	8	-	37
(Key at 2)	Tri-2	3	9	25	2	8	-	79
<u>6T9</u>								
(Key at 4)	Tri	3	9	25	2	9	-	68
(Key at 8)	Pen	7	9	3	1	4	-	356
<u>6T10</u>								
(Key at 6)	Pen-1	5	9	19	3	2	-	134
(Key at 2)	Pen-2	1	9	19	3	4	-	5789


TRC TUBE DATA

11.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
<u>6U10</u>								
(Key at 5)	Tri-1	4	9	26	2	9	-	12
(Key at 0)	Tri-2	1	9	26	2	6	-	57
(Key at 3)	Tri-3	4	9	26	2	6	-	15
8B8	Tri	4	10	25	2	8	-	19
"	Pen	4	10	23	2	2	-	367
<u>8B10</u>								
(Key at 0)	Tri-1	1	11	25	2	7	-	56
	Tri-2	1	11	25	2	2	-	34
(Key at 6)	Di-1	7	11	18	3	2	-	3
	Di-2	7	11	18	3	-	-	1
8C18	Tri	4	10	23	2	3	-	12
"	Tet	4	10	23	2	8	-	679
8FQ7	Tri-1	4	11	6	1	8	-	67
"	Tri-2	4	11	6	1	3	-	12
8HG8	Tri	4	11	23	2	3	13	67
"	Pen	4	11	22	2	1	13	289
8JK8	Di-1	4	11	18	3	8	-	67
"	Di-2	4	11	18	3	3	-	12
8JV8	Tri	4	11	18	3	1	-	23
"	Pen	4	11	17	3	-	-	789
8KA8	Tri	4	11	24	2	3	-	12
"	Pen	4	11	22	2	3	-	6789
8LC8	Tri	4	10	24	2	3	5	12
"	Pen	4	10	22	2	7	5	689
	May show short on 3-7							
9A8	Tri	4	12	24	2	8	-	19
"	Pen	4	12	24	2	7	-	236
9GV8	Tri	4	12	24	2	3	-	12
"	Pen	4	12	22	2	8	-	679
9KZ8	Tri	4	12	22	2	8	-	19
"	Pen	4	12	22	2	3	-	267
<u>10AL11</u>								
(Key at 2)	Pen-1	1	12	18	3	4	3	5689
(Key at 6)	Pen-2	5	12	18	3	2	7	134

KEEP YOUR TUBE TESTER

Up - To - Date

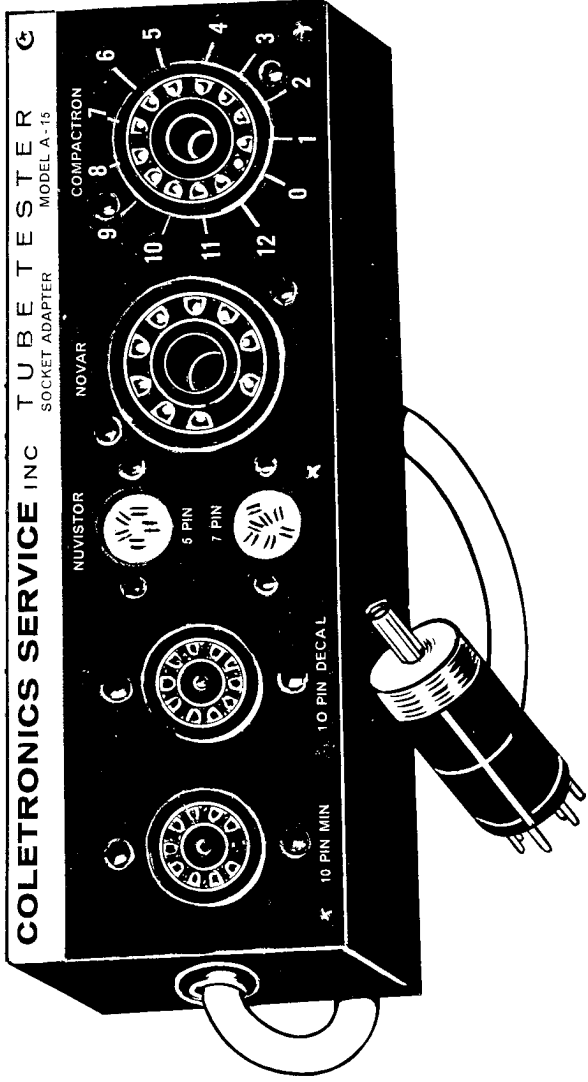

TEST ALL THE NEW TUBES — MODEL A-15 ADAPTER

10 PIN MIN
 12 PIN COMPACTRON
 AND THE JUST RELEASED
 10 PIN DECAL !

5 PIN NUUVISTOR
 7 PIN NUUVISTOR
 9 PIN NOVAR

- A SIX SOCKET ADAPTER UNIT THAT INSTANTLY MODERNIZES YOUR TUBE TESTER FOR ABOVE TYPE TUBES.
- THE HANDY FLEXIBLE CABLE PLUG IS SIMPLY INSERTED INTO THE EXISTING 9 PIN SOCKET OF YOUR TUBE TESTER. ATTACH THE TESTERS GRID CAP TO THE ADAPTER AND THE UNIT IS NOW READY TO OPERATE.
- NO SWITCHING IS NECESSARY. FOR COMPACTRONS, SIMPLY ROTATE THE TUBE AS DIRECTED IN THE TUBE DATA MANUAL.

NET PRICE: \$13.95

COLETRONICS SERVICE INC. 78-63 76th Street Glendale, L.I., N.Y. 11227

- Please ship Model A-15 Adapter at \$13.95 each.
- Enclosed find check or money order totaling

SHIP TO: --- PLEASE PRINT NAME AND ADDRESS

NAME

STREET

CITY STATE Zip Code

TRC TUBE DATA

12.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
10DX8	Tri	4	12	23	2	3	-	12
"	Pen	4	12	23	2	7	-	689
10EM7	Tri-1	7	12	26	2	6	-	45
"	Tri-2	7	12	22	2	3	-	12
10GF7	Tri-1	4	12	29	2	1	-	89
"	Tri-2	4	12	23	2	3	-	26
10GN8	Tri	4	12	24	2	1	-	23
"	Pen	4	12	22	2	6	-	789
10HF8	Tri	4	12	24	2	1	-	23
"	Pen	4	12	22	2	6	-	789
10JA8	Tri	4	10	24	2	1	-	23
"	Tet	4	10	24	2	6	-	789
10JY8	Tri	4	12	18	3	1	-	23
"	Pen	4	12	18	3	6	-	789
10KU8	Di-1	4	12	25	3	1	5	3
"	Di-2	4	12	25	3	1	-	2
"	Pen	4	12	22	2	6	-	789
10LB8	Tri	4	12	29	2	1	-	23
"	Pen	4	12	22	2	6	-	789
<u>11AR11</u>								
(Key at 2)	Pen-2	3	12	21	2	8	-	4567
(Key at 8)	Pen-1	9	12	21	2	6	-	2345
11KV8	Tri	4	12	23	2	1	-	23
"	Pen	4	12	21	2	6	-	789
12AJ7		2	13	3	1	5	-	3468
<u>12AL11</u>								
(Key at 2)	Pen-1	1	13	18	3	4	3	5689
(Key at 6)	Pen-2	5	13	18	3	2	7	134
12AU8	Tri	4	13	24	2	1	-	23
"	Pen	4	13	24	2	6	-	789
<u>12AX3</u>								
(Key at 5)		6	13	24	2	0	29	●29
	●Ignore glow on 2							
12AX12		7	13	23	2	0	28	281

TRC TUBE DATA

13.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
12AY3		4	13	24	2	9	27	●27
		●Ignore glow on 2						
<u>12BE3</u>								
(Key at 2)		1	13	23	2	9	60	60
		Must show short on 6-0						
<u>12BT3</u>								
(Key at 0)		1	13	2	4	7	-	4
12DM4		7	13	24	2	3	-	5
12FV7	Di-1	5	9	18	3	8	49	67
"	Di-2	4	9	18	3	3	59	12
12FX5		3	13	17	3	1	25	267
		Lever 5 must be thrown to open position						
12GJ5		4	13	24	2	3	1267	670
		Levers 1-2 must be thrown to open position						
12GT5		4	13	23	2	3	1267	●12679
		●Ignore glow on 12						
12JB6		4	13	18	3	3	1267	670
		Levers 1-2 must be thrown to open position						
12JT6		4	13	23	2	3	17	279
		Lever 1 must be thrown to open position						
<u>12JZ8</u>								
(Key at 8)	Pen	9	13	23	2	4	12	●1230
		●Ignore glow on 1						
(Key at 5)	Tri	6	13	26	2	3	-	27
12KA8	Tri	4	13	24	2	3	-	12
"	Pen	4	13	22	2	3	-	6789
12KL8	Pen	4	13	24	2	3	-	1267
"	Di	4	13	28	3	-	-	8
13CM5		2	13	23	2	38	1348	459
		Must show short on 1-3-4-8						
		Cathode short test - throw 3-8 together						
13CW4		4	13	17	3	3	-	12
13CW9		4	12	17	3	3	-	27

TRC TUBE DATA

14.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
<u>13FM7</u>								
(Key at 7)	Tri-1	6	13	19	3	3	-	45
(Key at 2)	Tri-2	1	13	19	3	9	-	57
13GB5*		4	13	22	2	38	123678	160
*Magneval base - do not insert fully in socket Levers 2-7 must be thrown to open position								
13GF7	Tri-1	4	13	29	2	1	-	89
"	Tri-2	4	13	23	2	3	-	26
<u>13J10</u>								
(Key at 0)	Pen-1	0	13	26	4	8	1	4567
(Key at 6)	Pen-2	5	13	18	3	9	7	248
14JG8	Di-1	4	14	18	3	3	-	2
"	Di-2	4	14	18	3	1	-	6
"	Tri	4	14	19	3	7	-	89
15A6		4	14	25	2	3	-	1267
<u>15AF11</u>								
(Key at 7)	Pen	6	14	19	3	3	-	459
(Key at 2)	Di-1	1	14	19	3	9	-	56
(Key at 0)	Di-2	1	14	19	3	5	-	68
15AQ3		4	14	23	2	0	*	●389
●Ignore glow on 38 *Cont test - 1236789								
<u>15BD11</u>								
(Key at 0)	Tri-1	1	14	24	2	5	-	68
	Tri-2	1	14	25	2	7	-	34
(Key at 5)	Pen	4	14	25	2	1	-	237
15CW5		4	14	21	2	3	-	●126978
●Ignore glow on 1-6 May show short on 1-2-6-9-7-8								
15DQ8	Tri	4	14	23	2	3	-	12
"	Pen	4	14	24	2	7	-	689
<u>15FM7</u>								
(Key at 7)	Tri-1	6	14	19	3	3	-	45
(Key at 2)	Tri-2	1	14	19	3	9	-	57
15F07		5	14	19	2	0	-	12

TRC TUBE DATA

15.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
<u>15FY7</u>								
(Key at 5)	Tri-1	4	14	8	1	1	-	23
(Key at 2)	Tri-2	1	14	22	2	9	-	57
15HB6		4	14	22	2	1	3689	●236789
	●Ignore glow on 3-6							
16GK6		4	15	23	2	1	39	●2379
	●Ignore glow on 3							
<u>16GY5</u>								
(Key at 4)		3	14	22	2	18	1278	2790
	Must show short on 1-2-7-8							
	Cathode short test - throw levers 1-8 together							
<u>17AX3</u>								
(Key at 5)		6	15	24	2	0	29	●29
	●Ignore glow on 2							
17AY3		4	15	24	2	9	27	●27
	●Ignore glow on 2							
17B4		2	15	8	1	-	-	35
<u>17BE3</u>								
(Key at 2)		1	15	23	2	9	60	60
	Must show short on 6-0							
<u>17BF11</u>								
(Key at 0)	Pen-1	1	15	28	2	2	-	3567
(Key at 8)	Pen-2	7	15	23	2	4	-	356
17C9	Tet-1	4	15	24	2	6	-	789
"	Tet-2	4	15	24	2	0	-	123
17DM4		7	15	24	2	3	-	5
<u>17GE5</u>								
(Key at 5)		6	15	23	2	29	2389	●7380
	●Ignore glow on 3							
17GJ5		4	15	24	2	3	1267	670
	Levers 1-2 must be thrown to open position							
17GT5		4	15	23	2	3	1267	●12679
	●Ignore glow on 12							
17GT6		1	15	28	2	2	-	3567

TRC TUBE DATA

16.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
<u>17GV5</u>								
(Key at 4)		3	15	24	2	18	1278	2790
		Must show short on 1-2-7-8						
		Cathode short test - throw levers 1-8 together						
17GW6		2	15	18	3	8	-	450
17HC8	Tri	4	15	18	3	8	-	19
"	Pen	4	15	18	3	2	-	367
17JB6		4	15	18	3	3	1267	670
		Levers 1-2 must be thrown to open position						
17JG6		4	15	17	3	3	17	279
		Lever 1 must be thrown to open position						
17JK8	Di-1	4	15	18	3	8	-	67
"	Di-2	4	15	18	3	3	-	12
17JT6		4	15	23	2	3	17	279
		Lever 1 must be thrown to open position						
<u>17JZ8</u>								
(Key at 8)	Pen	9	15	23	2	4	12	●1230
		●Ignore glow on 1						
(Key at 5)	Tri	6	15	26	2	3	-	27
17W6		2	15	24	2	8	-	367
<u>18GV5</u>								
(Key at 4)		3	16	24	2	18	1278	2790
		Black grid cap goes to top of tube						
19HR6		3	16	21	2	7	-	156
19HS6		3	16	22	2	7	-	1256
19JN8	Pen	4	16	23	2	8	-	679
"	Tri	4	16	22	2	3	-	12
19KG8	Tri	2	16	22	2	3	-	12
"	Pent	2	16	22	2	8	-	679
<u>21GY5</u>								
(Key at 4)		3	17	22	2	18	1278	2790
		Cathode short test - throw 1-8 together						
21HB3		2	22	18	2	-	-	2790

TRC TUBE DATA

17.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
<u>21HB5</u>								
(Key at 0)		1	17	22	2	4	-	237
22JG6		4	17	17	3	3	17	279
		Lever 1 must be thrown to open position						
26JG6		4	18	17	3	3	17	279
		Lever 1 must be thrown to open position						
27GB5*		4	18	22	2	38	123678	160
		*Magnoval base - do not insert fully in socket Levers 2-7 must be thrown to open position						
28GB5*		4	18	22	2	38	123678	160
		*Magnoval base - do not insert fully in socket Levers 2-7 must be thrown to open position						
<u>33GT7</u>								
(Key at 4)	Di	3	19	18	3	8	-	6
	Pen	3	19	24	2	0	-	129
<u>33GY7</u>								
(Key at 3)	Di	2	19	18	3	7	-	5
(Key at 4)	Pen	3	19	23	2	0	-	12
35C3		3	19	3	1	7	-	5
50BM8	Tri	4	20	19	3	8	-	19
"	Pen	4	20	19	3	2	-	367
GL-866A		1	4	31	2	-	-	0
5896	Di-1	3	9	6	1	7	-	5
"	Di-2	3	9	6	1	2	-	1
5933		1	9	18	3	4	5	023
6085	Tri-1	9	9	7	1	3	45	12
"	Tri-2	9	9	7	1	8	-	67
		Fil Cont - also throw 4-5 together						
6094		3	9	19	3	4	1245679	124
		Levers 6-7-9 must be thrown to open position						
6216A		4	9	23	2	38	1368	●1267
		●Ignore glow on 1						
6217		4	9	24	9	2	-	1267

TRC TUBE DATA

18.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
CK6397		5	2	7	1	-	17	368
6485		3	9	3	1	7	-	1256
CK6526		5	2	26	2	-	-	124
6686		4	9	24	2	3	16	2789
7119	Tri-1	8	9	23	2	6	45	79
"	Tri-2	8	9	23	2	3	-	12
7408		2	9	8	1	8	-	345
7551		4	13	25	2	19	1389	●23867
	●Ignore glow on 3							
7558		4	9	25	2	19	1389	●23867
	●Ignore glow on 3							
7581		2	8	24	2	8	-	345
7586		4	9	17	3	3	5	12
7591		2	9	24	2	5	48	●4836
	●Ignore glow on 4							
7687	Tri	4	9	25	2	8	-	19
"	Pen	4	9	23	2	7	-	236
7695		4	20	23	2	7	-	169
7728	Tri-1	9	9	4	1	8	45	67
"	Tri-2	9	9	4	1	3	-	12
7729	Tri-1	9	9	27	2	8	45	67
"	Tri-2	9	9	27	2	3	-	12
7730	Tri-1	9	9	8	1	8	45	67
"	Tri-2	9	9	8	1	3	-	12
7731	Tri	4	9	24	2	8	-	19
	Pen	4	9	24	2	7	-	236
7733		6	9	22	2	1	3459	278
7802	Tri-1	7	9	23	2	6	-	45
"	Tri-2	7	9	23	2	3	-	12

TRC TUBE DATA

19.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
7868		4	9	23	2	3	1267	●12679
		●Ignore glow on 12						
<u>7984</u>		6	13	24	2	239	23915	450
(key at 7)		Must show short on 2-3-9-1-5 Throw lever 1 to open position						
8056		4	9	16	3	3	-	12
8106		4	13	18	3	269	23689	1378
		Must show short on 23689 Cathode short test - throw 2-6-9 together						
8113		3	9	22	2	27	27	156
		Must show short on 2-7 Cathode short test - throw 2-7 together						
<u>8156</u>		3	13	26	2	60	67890	129
(Key at 4)		Levers 7-8 must be thrown to open position						
8203		4	9	17	3	3	5	12
8441		4	9	18	3	3	-	12
8532		3	9	4	1	2	156	●1567
		●Ignore glow on 1-5						
FOREIGN								
DK-40		1	2	21	3	-	-	34
DL-95		5	2	29	2	-	1267	●2634
		●Ignore glow on 2						
DL-98		26	2	29	2	-	45	137
DY-87		258	2	21	4	-	1469	0
E-80CC	Tri-1	9	9	7	1	3	45	12
"	Tri-2	9	9	7	1	8	-	67
		Fil Cont - also throw 4-5 together						
E-81L		4	9	24	2	3	16	2789
EK-11		6	13	24	3	2	19	10

TRC TUBE DATA

20.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
E-182CC	Tri-1	8	9	23	2	6	45	79
"	Tri-2	8	9	23	2	3	-	12
EB-91	Di-1	3	9	18	3	5	-	2
"	Di-2	3	9	18	3	1	-	7
EBC-81	Tri	4	9	7	1	3	79	12
"	Di-1	4	9	29	3	-	-	8
"	Di-2	4	9	26	3	-	-	6
EC-97		3	9	22	2	17	17	25
ECC-34	Tri-1	7	8	7	1	6	-	45
"	Tri-2	7	8	7	1	3	-	12
ECC-91	Tri-1	3	9	24	2	7	-	25
"	Tri-2	3	9	24	2	-	-	16
ECC-189	Tri-1	4	9	22	2	8	-	67
"	Tri-2	4	9	22	2	3	-	12
ECF-83	Tri	4	9	19	3	1	-	23
"	Pen	4	9	19	3	8	-	679
ECH-35	Tri	2	9	26	2	8	-	56
"	Hex	2	9	26	2	-	-	3459
ECL-85	Tri	4	9	24	2	3	-	12
"	Pen	4	9	22	2	8	-	679
EF-39		2	9	5	1	8	-	3450
EF-92		3	9	6	1	2	-	1567
EL-13		2	9	23	2	8	-	567
EL-32		2	9	6	1	8	-	340
EL-33		2	9	24	2	8	-	345
EL-82		2	9	24	2	3	-	279
EL-85		4	9	6	1	3	1268	●126879
	●Ignore glow on 1-6							
EL-91		3	9	25	2	2	-	157
EL-500		4	9	22	2	38	123678	160
	Lever 2-7 must be thrown to open position							

TRC TUBE DATA

21.

TUBE	SECT	A	B	C	D	CATH	CONT	TEST
EM-34		2	9	0	4	8	-	365
	See instructions for eye test							
EY-86		258	9	21	4	-	1469	0
EY-87		258	9	21	4	-	1469	0
LCL-84	Tri	4	12	23	2	3	-	12
"	Pen	4	12	23	2	7	-	689
PCL-81	Tri	4	13	26	2	38	38	17
"	Pen	4	13	23	2	-	-	269
PCL-84	Tri	4	14	23	2	3	-	12
"	Pen	4	14	24	2	7	-	689
PL-83		4	14	25	2	3	-	1267
PL-84		4	14	18	3	3	126789	279
	Lever 1-6-8 must be thrown to open position							
PL-500		4	18	22	2	38	123678	160
	Levers 2-7 must be thrown to open position							
UAA-91	Di-1	3	16	18	3	1	-	7
"	Di-2	3	16	18	3	5	-	2
UCF-12	Tri	2	17	19	3	8	-	45
	Pen	2	17	19	3	-	-	167
UCL-82	Tri	4	20	19	3	8	-	19
"	Pen	4	20	19	3	2	-	367
UL-84		4	19	23	2	3	12689	●126897
	●Ignore glow on 1-6-8							
XCL-82	Tri	4	10	25	2	8	-	19
"	Pen	4	10	23	2	2	-	367
XCL-85	Tri	4	12	24	2	3	-	12
"	Pen	4	12	22	2	8	-	679
YC-97		3	5	22	2	17	17	25
YC-98		246	7	0	0	-	-	19